
ASPECT 41

Woven stainless steel architectural wire mesh

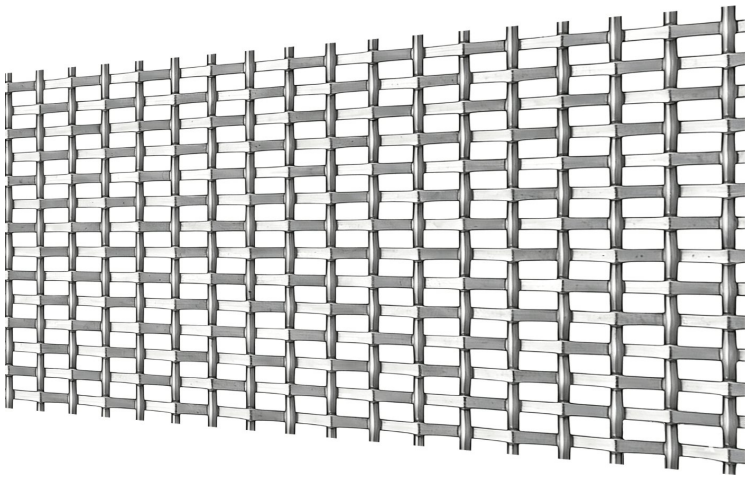

This unique woven wire mesh combines stainless steel with different wire types (round and flat), using advanced techniques to create a dynamic look. It’s robust and multi-functional, crafted as mixed-alloy or all-stainless styles with plain steel variants available, making it an excellent choice for elevator decor, wall cladding, ceilings and heavy-duty space partitions.

Technical Data

Model	ASPECT 41
Series	ASPECT
Construction	Round and flat wires, embossed
Panel type	Rigid
Open area	41.1%
Overall thickness	9/64" (3.56 mm)
Aspect ratio (opening)	1.27:1
Wire diameter (nominal)	0.071" (1.8 mm)
Opening (nominal, W x H)	0.142" x 0.110" (3.6 x 2.8 mm)
Wire centers (nominal)	0.213" x 0.181" (5.4 x 4.6 mm)
Opening limitation (largest sphere)	0.110" (2.8 mm)
Weight (nominal, stainless steel)	8.4 kg/m² (1.72 lb/ft²)
Standard materials	Stainless steel 304 / 316, Plain / galvanized steel, Stainless / copper-alloy mixed weave
Finishes	Mill, brushed or electropolished; powder coating (any RAL); PVD colors (titanium gold, rose gold, champagne, black titanium); antique plating (interior only)
Supply format	Rolls, cut sheets or framed panels made to your drawings. Maximum size depends on pattern and alloy - send your opening sizes for confirmation.

Weight by Material (nominal)

Material	kg/m²	lb/ft²
Stainless steel 304 / 316	8.4	1.72
Plain / galvanized steel	8.3	1.70
Stainless / copper-alloy mixed weave	8.9	1.82

Key Features

- Combines round and flat wires for a dynamic surface
- Available as mixed-alloy or all-stainless versions
- Robust, multi-functional construction

Ideal for: Elevator interiors, wall cladding, ceilings and heavy-duty partitions.

Performance & Design Data

Solidity (1 - open area)	58.9%
Geometric cut-off angle (short opening)	38°
Railing infill check (100 mm / 4" sphere)	Openings smaller than 100 mm (4")
Fire behaviour	Bare stainless steel is a non-combustible metal. Coated, plated or backed finishes: classification per project test report.
Corrosion guidance	304 for interiors and protected exteriors; 316 / 316L for exterior, coastal and polluted environments.

Beyond this incidence angle, direct light and view through the short opening are blocked (louver effect).

Installation & Framing

Recommended fixing	Framed panels: U-edging (captured edge), flat-bar clamp or angle frame. For wall and elevator cladding, clip or bond to an aluminum honeycomb or MDF backer.

How to Specify

1. Pattern name, e.g. AXIS 81
2. Material and grade, e.g. Stainless steel 316
3. Finish, e.g. PVD Black Titanium or RAL 9005
4. Panel width x height and quantity
5. Opening direction (rectangular patterns)
6. Edge or frame profile and size
7. Indoor or exterior, and site location
8. Target delivery date

Nominal values are calculated from pattern geometry for stainless steel and may vary by approx. 10-15%. Weights for other alloys are calculated from the stainless steel value. Wire diameter, opening, alloy, finish and panel size can be customized - please confirm final specifications with a physical sample.