
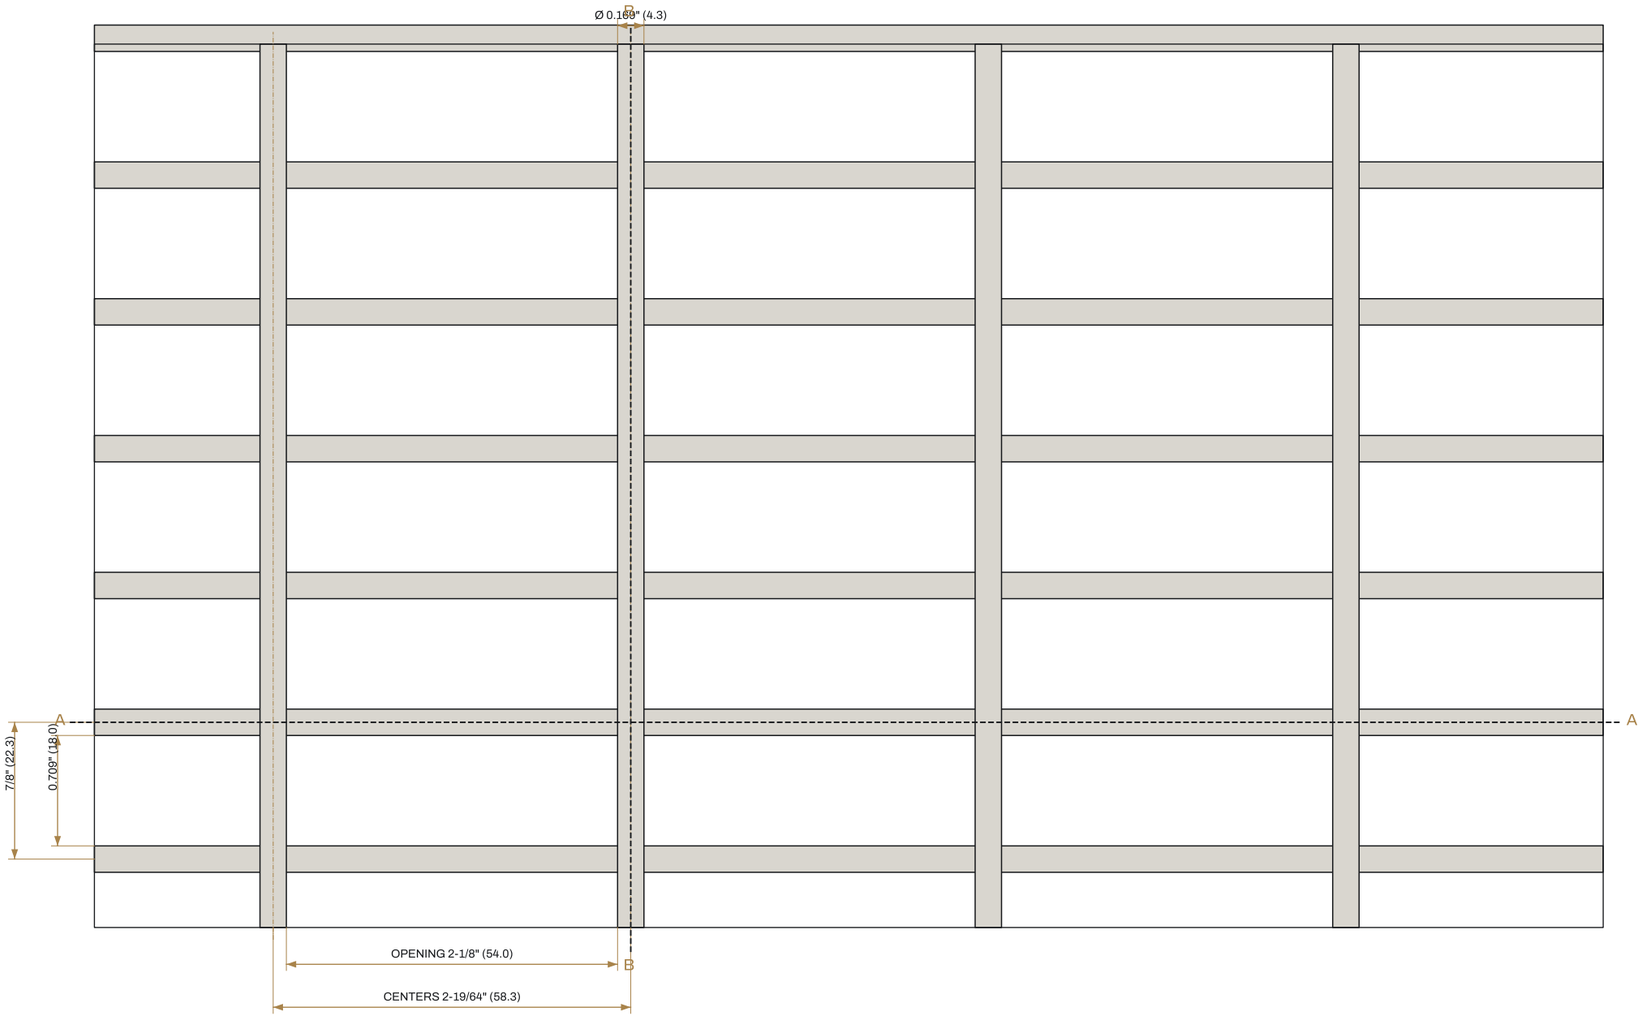



1 PATTERN ELEVATION

SCALE 1:1

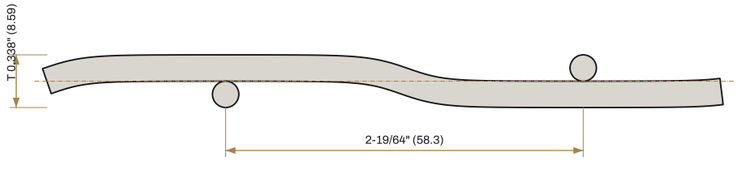


2 SECTION A-A

SCALE 1:1

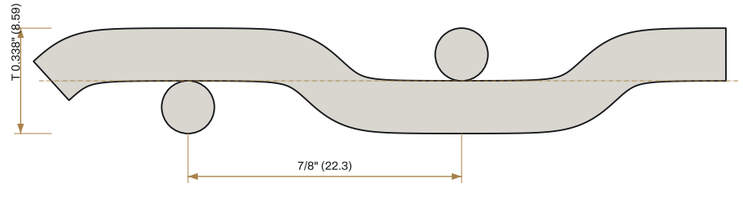

3 SECTION B-B

SCALE 2:1

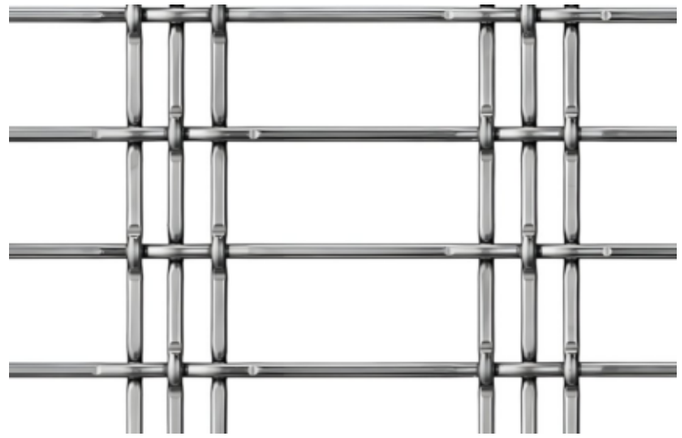

Product image - visual reference, not to scale

TECHNICAL DATA

MODEL	ASPECT 74
CONSTRUCTION	Triple-shute lock crimp
PANEL TYPE	Rigid
OPEN AREA	74.8%
OVERALL THICKNESS	11/32" (8.59 mm)
WIRE DIAMETER	0.169" (4.3 mm)
OPENING (W x H)	54.0 x 18.0 mm (2.126" x 0.709")
WIRE CENTERS	58.3 x 22.3 mm (2.295" x 0.878")
CUT-OFF ANGLE	64° (short opening)
WEIGHT (SS)	1.54 lb/sq ft (7.5 kg/m²)
STANDARD MATERIALS	Stainless steel 304 / 316, Plain / galvanized steel, Brass, Bronze, Copper
MASTERFORMAT	05 70 00 Decorative Metal

NOTES

1. All dimensions nominal, shown imperial (metric mm). Drawing geometry in mm.
2. Values per MAISHI data sheet: calculated from pattern geometry for stainless steel, tolerance approx. 10-15%.
3. Wires drawn as an equivalent single-wire grid matching the published opening, wire centers and open area; grouped wires and crimp form shown schematically - see product image and physical sample.
4. Openings shown with the long side horizontal. State the opening direction on the order (rotation 90 deg available).
5. Maximum panel size depends on pattern and alloy - confirm with MAISHI. Structural and wind load design by project engineer.
6. For design intent only. Verify all dimensions with a physical sample and MAISHI shop drawings before fabrication.

MAISHI WIRE MESH MFG

Since 1986 | sales@maishimfg.com | +86 311 8927 7936

DRAWING TITLE

ASPECT 74

Pattern elevation and sections

DRAWING NO.	SCALE	DATE	REV	SHEET
MS-AM-03	AS NOTED	2026-10-08	A	1 / 1

Design intent only - not for fabrication without MAISHI shop drawings.