
AXIS TWIN 64

Woven stainless steel architectural wire mesh

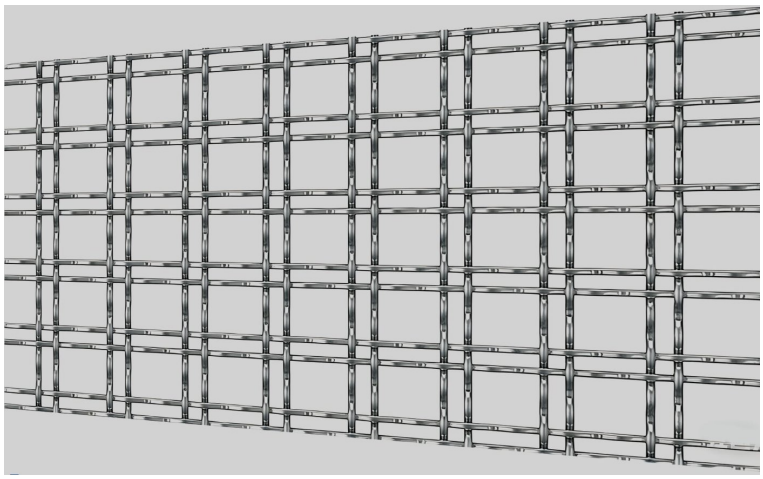

This compact twin-wire intercrimp mesh adds subtle elegance to any interior space, offering a refined texture that elevates the aesthetic of diverse decorative applications—ideal for cabinet panels, interior partitions, room dividers and decorative ceilings.

Technical Data

Model	AXIS TWIN 64
Series	AXIS
Construction	Twin-wire plain crimp
Panel type	Rigid
Open area	64.5%
Overall thickness	1/8" (3.2 mm)
Aspect ratio (opening)	1.00:1
Wire diameter (nominal)	0.063" (1.6 mm)
Opening (nominal, W x H)	0.256" x 0.256" (6.5 x 6.5 mm)
Wire centers (nominal)	0.319" x 0.319" (8.1 x 8.1 mm)
Opening limitation (largest sphere)	0.256" (6.5 mm)
Weight (nominal, stainless steel)	4.2 kg/m² (0.86 lb/ft²)
Standard materials	Stainless steel 304 / 316, Plain / galvanized steel, Brass, Bronze
Finishes	Mill, brushed or electropolished; powder coating (any RAL); PVD colors (titanium gold, rose gold, champagne, black titanium); antique plating (interior only)
Supply format	Rolls, cut sheets or framed panels made to your drawings. Maximum size depends on pattern and alloy - send your opening sizes for confirmation.

Weight by Material (nominal)

Material	kg/m²	lb/ft²
Stainless steel 304 / 316	4.2	0.86
Plain / galvanized steel	4.2	0.85
Brass	4.5	0.93
Bronze	4.7	0.95

Key Features

- Compact twin-wire intercrimp weave
- Refined texture that adds subtle elegance indoors
- Easy to integrate into joinery and fit-out

Ideal for: Cabinet panels, interior partitions, room dividers and decorative ceilings.

Performance & Design Data

Solidity (1 - open area)	35.5%
Geometric cut-off angle (short opening)	64°
Railing infill check (100 mm / 4" sphere)	Openings smaller than 100 mm (4")
Fire behaviour	Bare stainless steel is a non-combustible metal. Coated, plated or backed finishes: classification per project test report.
Corrosion guidance	304 for interiors and protected exteriors; 316 / 316L for exterior, coastal and polluted environments.

Beyond this incidence angle, direct light and view through the short opening are blocked (louver effect).

Installation & Framing

Recommended fixing	Framed panels: U-edging (captured edge), flat-bar clamp or angle frame. For wall and elevator cladding, clip or bond to an aluminum honeycomb or MDF backer.

How to Specify

1. Pattern name, e.g. AXIS 81
2. Material and grade, e.g. Stainless steel 316
3. Finish, e.g. PVD Black Titanium or RAL 9005
4. Panel width x height and quantity
5. Opening direction (rectangular patterns)
6. Edge or frame profile and size
7. Indoor or exterior, and site location
8. Target delivery date

Nominal values are calculated from pattern geometry for stainless steel and may vary by approx. 10-15%. Weights for other alloys are calculated from the stainless steel value. Wire diameter, opening, alloy, finish and panel size can be customized - please confirm final specifications with a physical sample.