
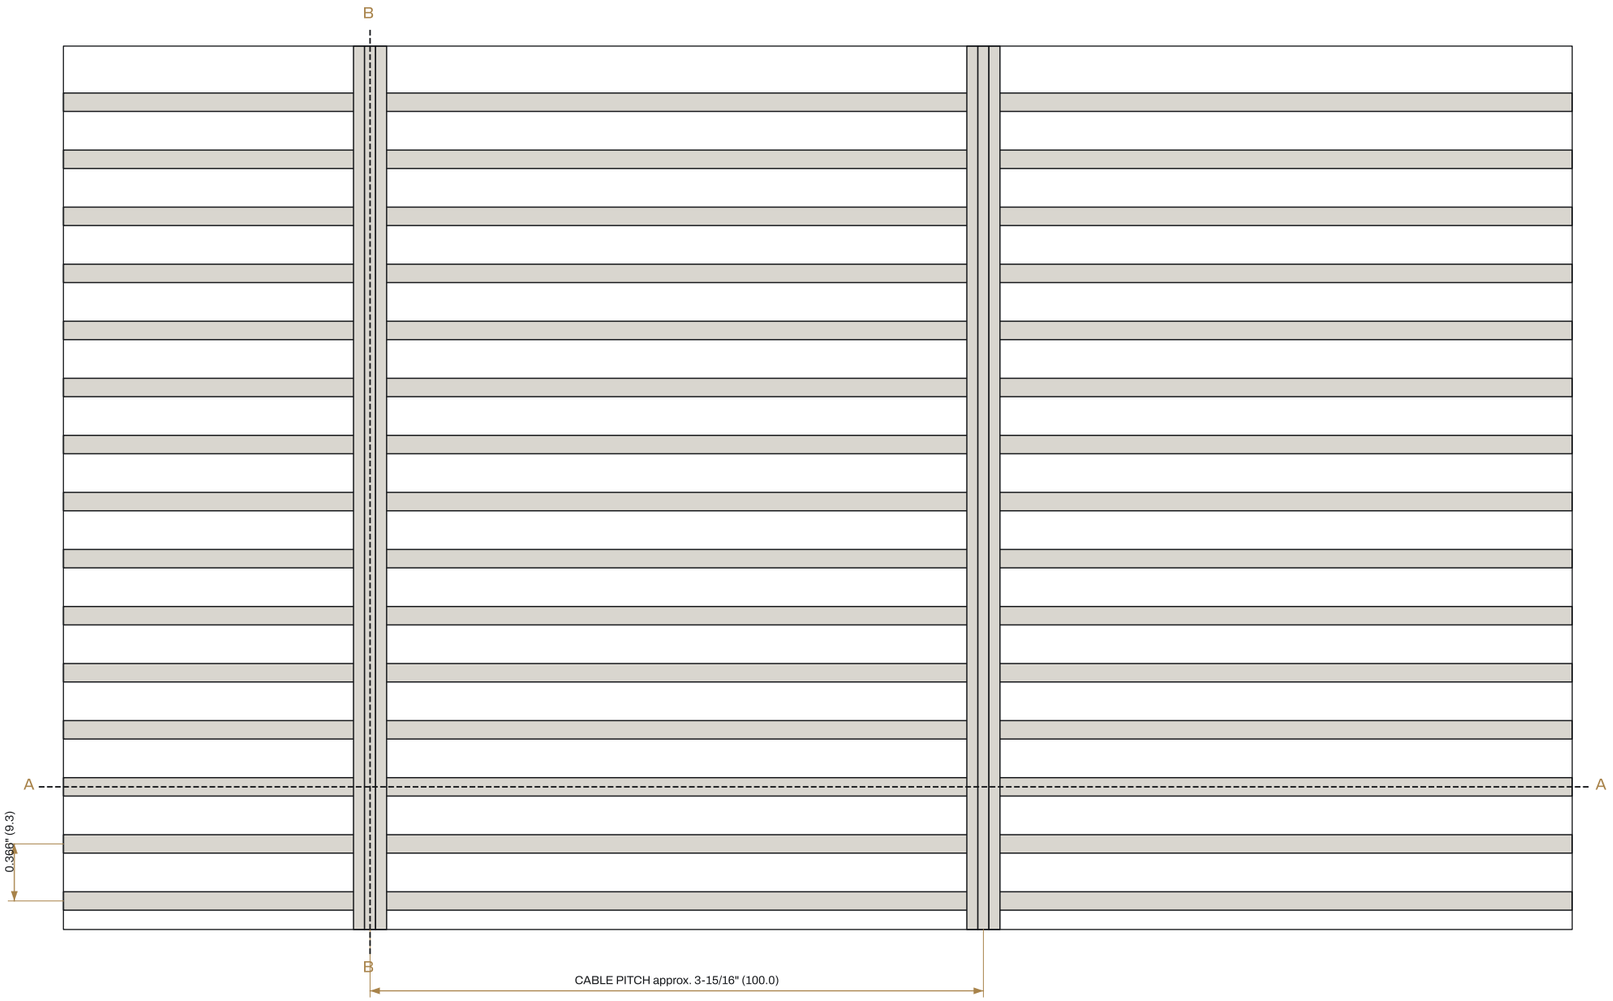



1 PATTERN ELEVATION

SCALE 1:1

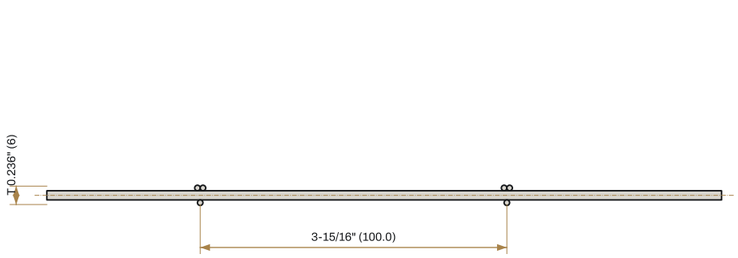


2 SECTION A-A

SCALE 1:2

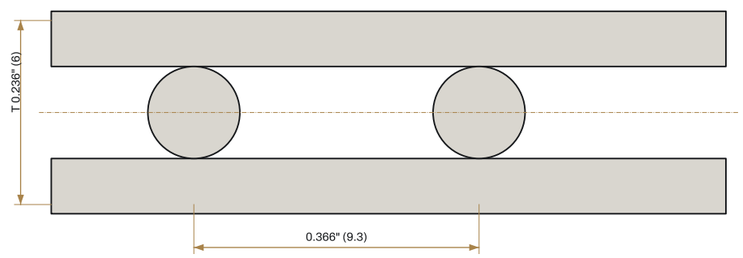

3 SECTION B-B

SCALE 5:1

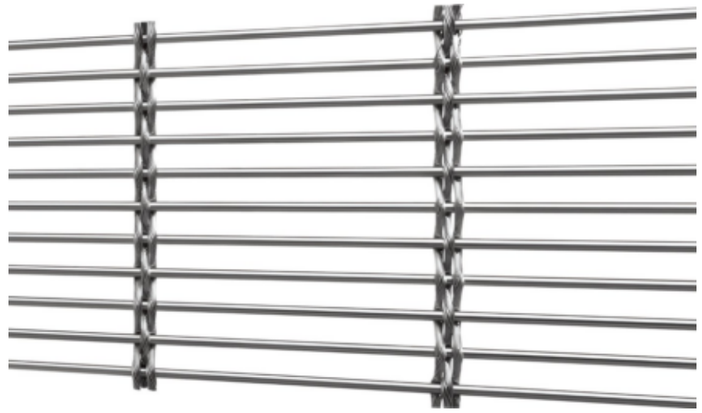

Product image - visual reference, not to scale

TECHNICAL DATA

MODEL	ASPECT REST 64
CONSTRUCTION	Triple cable cluster and rod
PANEL TYPE	Flexible (one direction)
OPEN AREA	64%
OVERALL THICKNESS	15/64" (6.0 mm)
WIRE DIAMETER	0.118" (3.0 mm)
OPENING	Pattern-specific
ROD / CABLE PITCH	Rod approx. 9.3 mm, cable approx. 100 mm (indicative)
WEIGHT (SS)	1.33 lb/sq ft (6.5 kg/m²)
STANDARD MATERIALS	Stainless steel 304 / 316
MASTERFORMAT	05 70 00 Decorative Metal

NOTES

1. All dimensions nominal, shown imperial (metric mm). Drawing geometry in mm.
2. Values per MAISHI data sheet: calculated from pattern geometry for stainless steel, tolerance approx. 10-15%.
3. Opening geometry is pattern-specific: wire spacing shown is indicative, tuned to the published open area and weight. Confirm on shop drawings.
4. Openings shown with the long side horizontal. State the opening direction on the order (rotation 90 deg available).
5. Maximum panel size depends on pattern and alloy - confirm with MAISHI. Structural and wind load design by project engineer.
6. For design intent only. Verify all dimensions with a physical sample and MAISHI shop drawings before fabrication.

MAISHI WIRE MESH MFG

Since 1986 | sales@maishimfg.com | +86 311 8927 7936

DRAWING TITLE

ASPECT REST 64

Pattern elevation and sections

DRAWING NO.	SCALE	DATE	REV	SHEET
MS-AM-05	AS NOTED	2026-10-08	A	1 / 1

Design intent only - not for fabrication without MAISHI shop drawings.